



**SUN AND UV  
PROTECTION**



**MANUAL OR ELECTRIC  
OPERATION**



**INSECT CONTROL**



**ZIPTRACK OUTDOOR BLIND**

[www.unihomeblind.com](http://www.unihomeblind.com)

# Zip Track Outdoor Roller Blind

## 1. Function:

① Reduces glare. ② Keeps away insects. ③ Blocks out rain and wind. ④ Anti UV. ⑤ Protects outdoor furniture.

## 2. System:

- ① Manual crank system
- ② Spring system
- ③ Electric motorized system

## 3. Motor & control method:

- ① Motor power: 110 V / 60 Hz, 230V/50Hz
- ② Motor Brand: **A-OK waterproof**, DOOYA, Somfy (only 230V)
- ③ Control method: remote control (individual controlled or multi controlled), sensor control and app control


## 4. Normal Fabric & **Phifer Fabric from USA**

- ① Blackou fabric: 0% openness
- ② Translucent fabric: 1%, 3%, 5%, 10%, 30%
- ③ Transparent fabric: TPU materials (fabric width:1.37m)

## 5. Product Model

- ① UN105 /UN125

# Control System

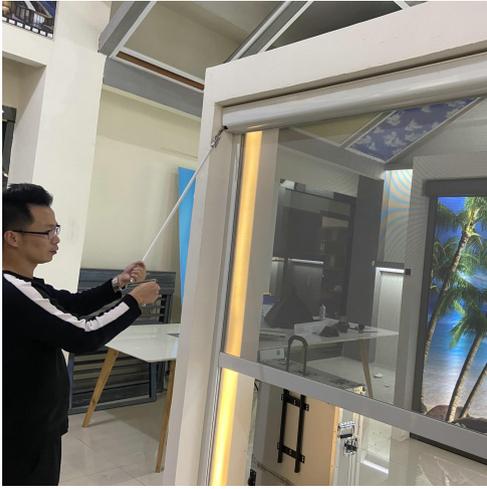

## Manual Crank System

Rotate the joining arm clockwise to raise or counter-clockwise to lower your outdoor blind.



## Spring-Balanced System

- One-touch convenience
- Quick and easy-to-use
- Leave at any height



## Motorized system


- Remote control
- Sensor control
- App control
- 110V or 230V electric power required



# Translucent, Transparent Or Blackout

## Strong and durable Mesh Fabric

- Our ziptrack outdoor blinds will accommodate for a variety of woven mesh fabric.
- Available in different openness: 0%, 1%, 3%, 5%, 10%, and 30%.

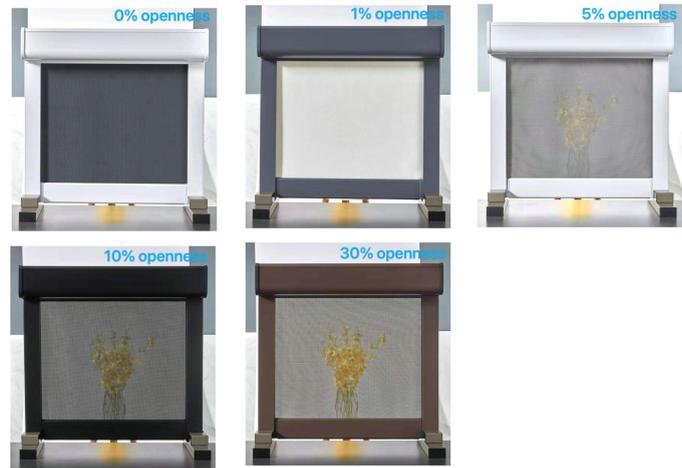


## Reduces heat transmission

- 50 – 99% Wind, Rain, Sun and UV Protection
- Offers privacy but maintains the view
- Potential to reduce your cooling requirements
- The weight and weave density of the mesh will influence the level of transparency, rainproof and UV protection.

## TPU for clear views

Clear TPU is a popular option for many people and businesses.

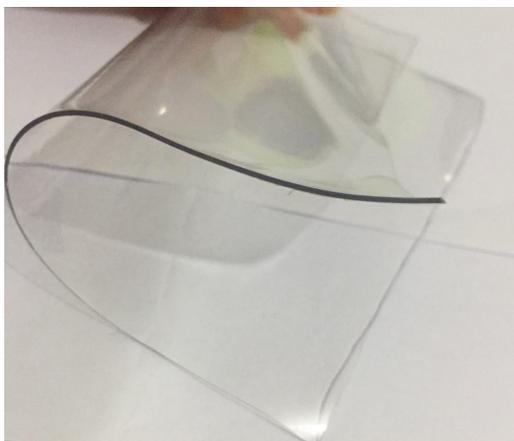

- Completely rain and wind proof surface
- High quality TPU for clear views beyond
- Perfect for maintaining warmth






# Zip Track Blind



UN105




UN125

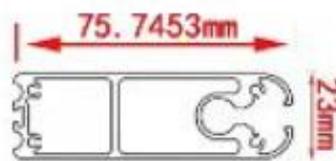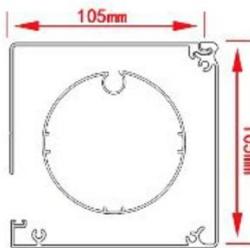

Model	available size	Frame color	cover & tube size
UN105	W: 0.68m-4m H: 0.5m-2.8m	white, light grey, dark grey, coffee ,black	cover: 105mm*105mm 70mm tube
UN125	W: 0.68m-6m H: 0.5m-6m	white, light grey, dark grey, coffee,black	cover: 125mm*125mm 78mm tube

# How to custom made your blind?

## Step 1: Confirm installation method and measure the blind size

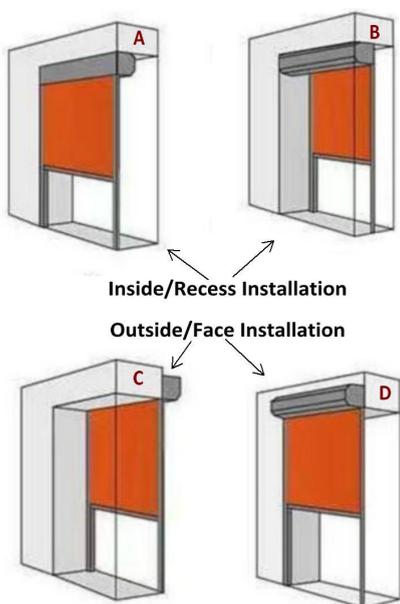


### For inside/recess installation


"Width: top, middle, and bottom three points measure width, take the minimum size minus 5 mm for product width, That is,  $W = \min(W1, W2, W3) - 5\text{mm}$ ;  
 Height: top, middle, and bottom three points measuring height, take the minimum size of 2mm for product height, That is,  $H = \min(H1, H2, H3) - 5\text{mm}$ ;  
 Measurement tolerances shall not exceed  $+1/-2\text{mm}$ ."

### For outside/face installation

$W = \text{Max}(W1, W2, W3) + \text{side track width}$   
 $H = \text{Max}(H1, H2, H3) + \text{cover height} + \text{bottom bar height}$

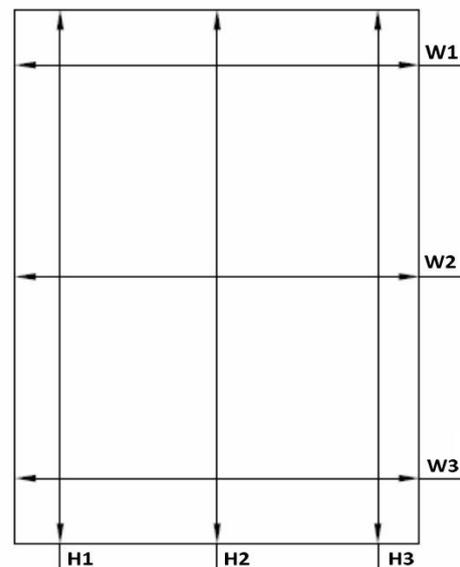

## Step 2: Confirm fabric (color and openness) & frame

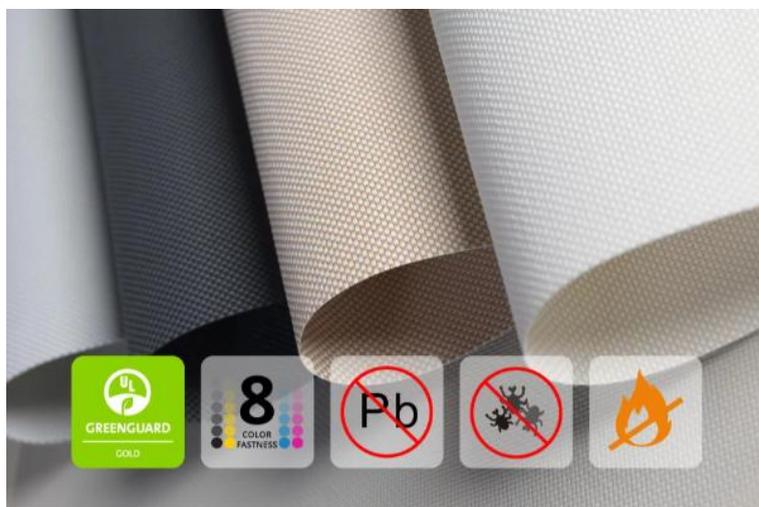

## Step 3: Confirm the system



Spring System



Manual Crank System



Motorized System

# 0 % blackout fabric



ZY00-101 白色 / White




ZY00-104 灰色 / Grey



ZY00-106 棕色 / Dark Bronze



ZY00-107 黑灰色 / Black Grey

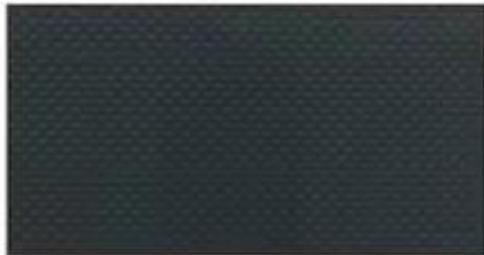

ZY00-108 黑色 / Black


## 技术参数 Technical datas

材质 / Material	25% Polyester + 75% PVC
克重 / Weight	630g/m <sup>2</sup> ± 5%
厚度 / Thickness	0.78mm ± 5%
色牢度 / Color fastness	ISO 105 B02 Grade 8
阻燃 / Flame retardant	NFPA701-2010 B1


# 1% open factor fabric




ZY01-101 白色 / White

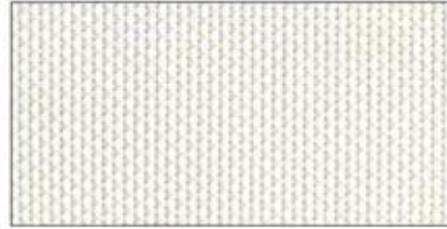

ZY01-102 米色 / Beige

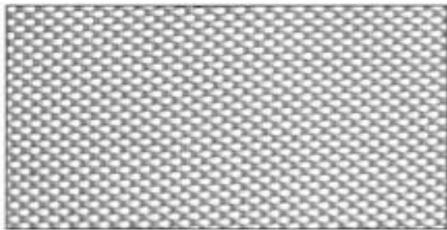

ZY01-103 灰白色 / White Grey

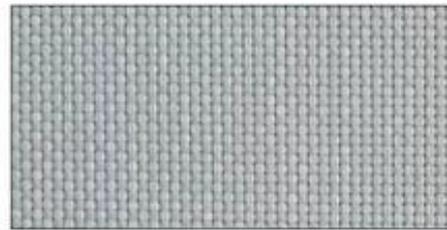

ZY01-104 浅灰色 / Light Grey




ZY01-105 深灰色 / Dark Grey



ZY01-106 棕色 / Dark Bronze



ZY01-107 黑灰色 / Black Grey

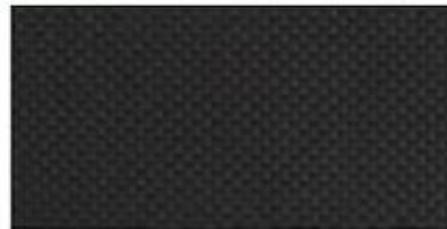

ZY01-108 黑色 / Black

## 技术参数 Technical datas

材质 / Material	22% Polyester + 78% PVC
克重 / Weight	510g/m <sup>2</sup> ± 5%
厚度 / Thickness	0.66mm ± 5%
色牢度 / Color fastness	ISO 105 B02 Grade 8
阻燃 / Flame retardant	NFPA701-2010 B1


# 3% open factor fabric



ZY03-101T 白色 / White



ZY03-104T 浅灰色 / Light Grey

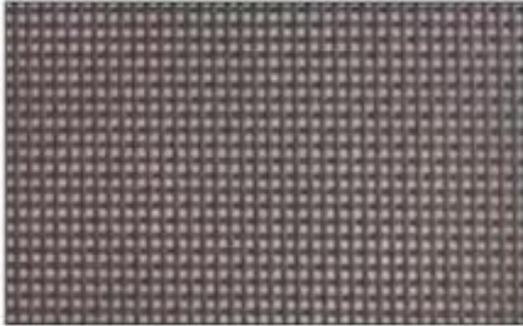


ZY03-105T 黑灰色 / Black Grey


## 技术参数 Technical datas

材 质 / Material	25% Polyester + 75% PVC
克 重 / Weight	610g/m <sup>2</sup> ± 5%
厚 度 / Thickness	0.87mm ± 5%
色牢度 / Color fastness	ISO 105 B02 Grade 8
阻 燃 / Flame retardant	NFPA701-2010 B1


# 5% open factor fabric

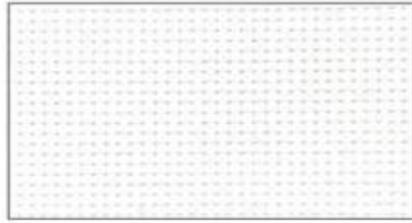


ZY05-101 白色 / White

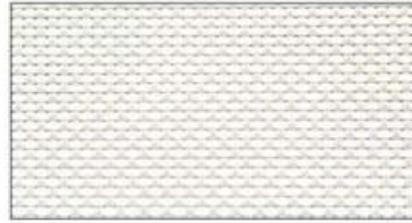

ZY05-102 米色 / Beige

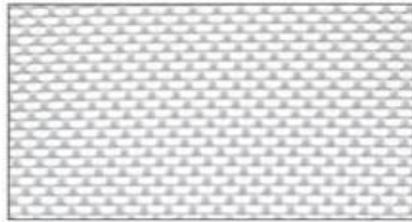

ZY05-103 灰白色 / White Grey

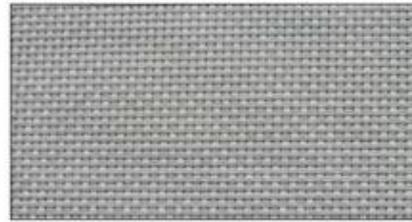


ZY05-104 浅灰色 / Light Grey



ZY05-105 深灰色 / Dark Grey



ZY05-106 咖啡色 / Coffee

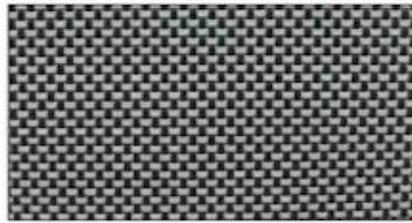

ZY05-107 黑灰色 / Black Grey



ZY05-108 黑色 / Black


## 技术参数 Technical datas

材 质 / Material	25% Polyester + 75% PVC
克 重 / Weight	540g/m <sup>2</sup> ± 5%
厚 度 / Thickness	0.70mm ± 5%
色牢度 / Color fastness	ISO 105 B02 Grade 8
阻 燃 / Flame retardant	NFPA701-2010 B1


# 10% open factor fabric



ZY10-101 白色 / White

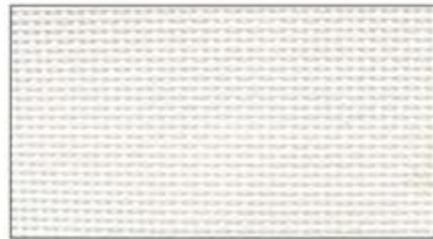

ZY10-102 米色 / Beige

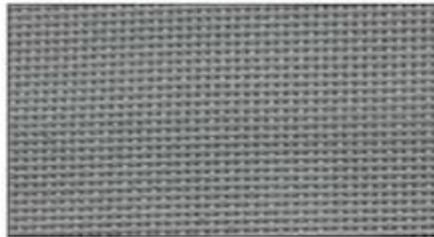

ZY10-104 浅灰色 / Light Grey




ZY10-105 深灰色 / Dark Grey



ZY10-106 咖啡色 / Coffee



ZY10-107 黑灰色 / Black Grey

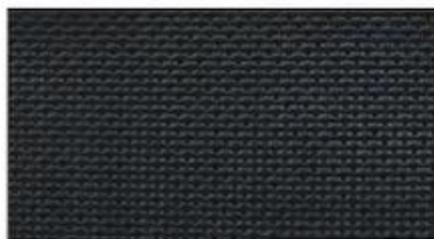

ZY10-108 黑色 / Black


## 技术参数 Technical datas

材 质 / Material	25% Polyester + 75% PVC
克 重 / Weight	430g/m <sup>2</sup> ± 5%
厚 度 / Thickness	0.65mm ± 5%
色牢度 / Color fastness	ISO 105 B02 Grade 8
阻 燃 / Flame retardant	NFPA701-2010 B1

# 30% open factor fabric



ZY30-101 白色 / White

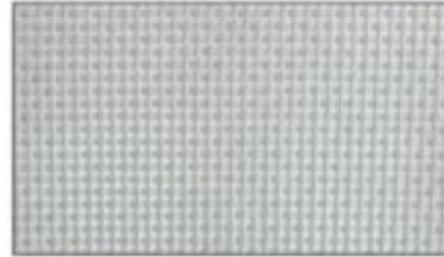

ZY30-104 浅灰色 / Light Grey



ZY30-106 咖啡色 / Coffee



ZY30-108 黑色 / Black

## 技术参数 Technical datas

材 质 / Material	25% Polyester + 75% PVC
克 重 / Weight	300g/m <sup>2</sup> ± 5%
厚 度 / Thickness	0.55mm ± 5%
色牢度 / Color fastness	ISO 105 B02 Grade 8
阻 燃 / Flame retardant	NFPA701-2010 B1

# 5% open factor fabric

fiberglass material


Good shrinkage, more stable



ZY05-101F/G 白色 / White



ZY05-102F/G 米色 / Beige

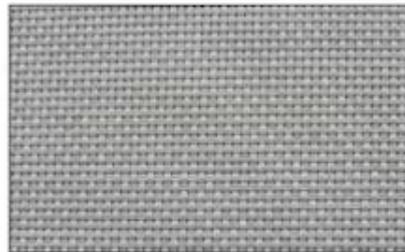

ZY05-104F/G 浅灰色 / Light Grey



ZY05-105F/G 深灰色 / Dark Grey



ZY05-108F/G 黑色 / Black


## 技术参数 Technical datas

材 质 / Material	25%Fiberglass+75%PVC
克 重 / Weight	500g/m <sup>2</sup> ( +/-5% )
厚 度 / Thickness	0.63mm ( +/-5% )
色牢度 / Color fastness	ISO 105 B02 7级
阻 燃 / Flame retardant	NFPA701-2010 B1

## famous fabric USA brand PHIFER

fabrics with excellent tensile strength, shrinkage ratio, and crease self-repair function

This is especially important for outdoor zip blinds and reduce the after-sales maintenance issues .

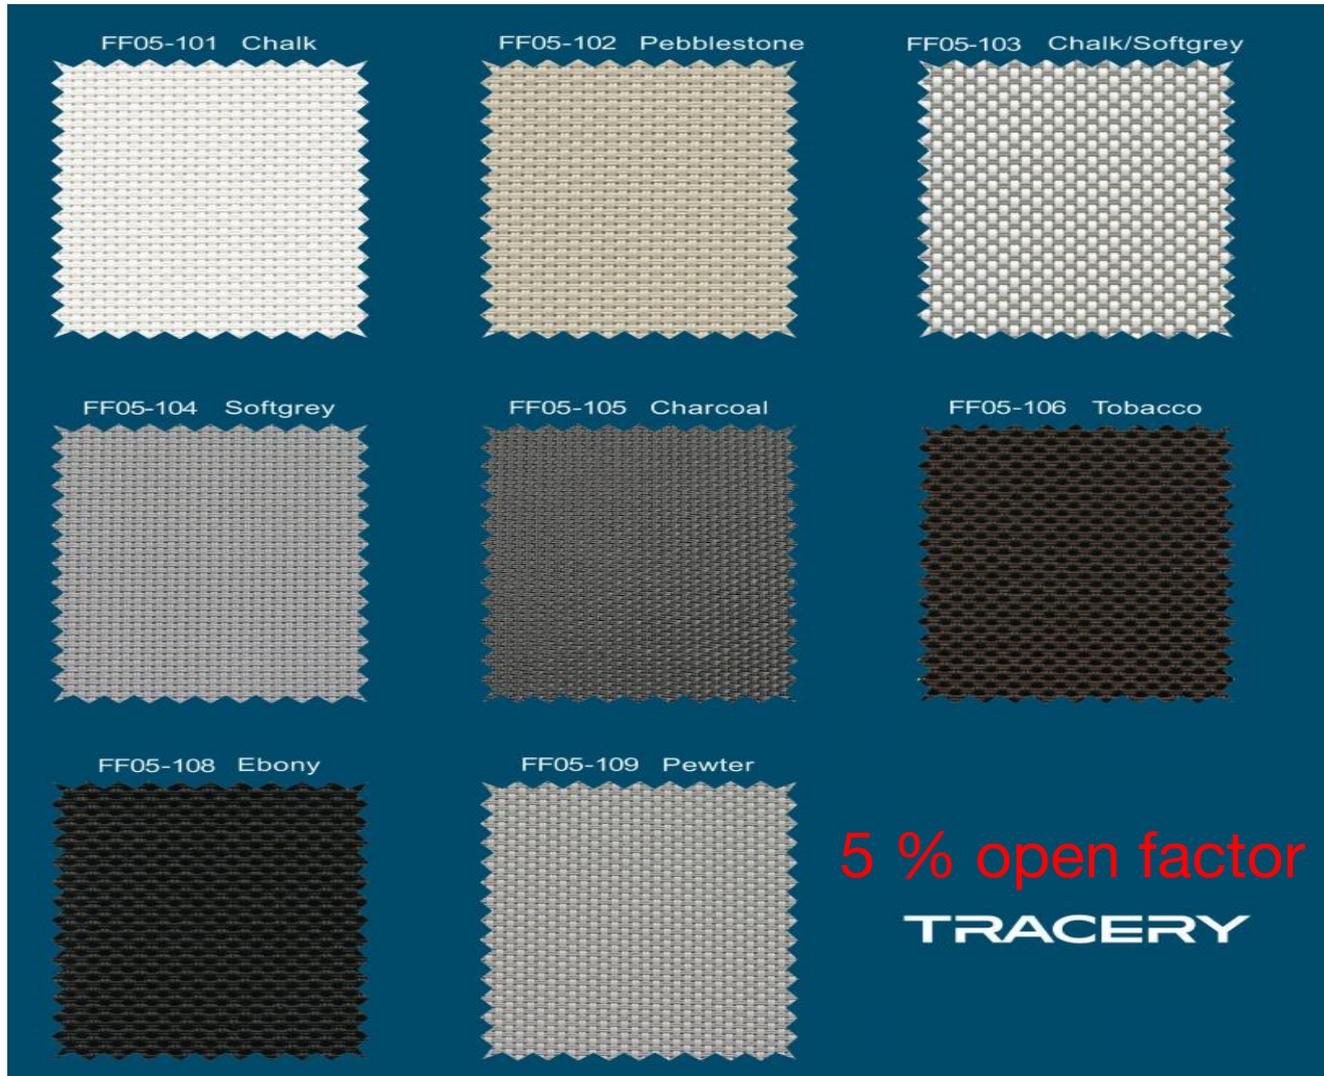

### COMPOSITION

25% Polyester  
75% Vinyl on Polyester

### MESH WEIGHT

18.0 oz/yd<sup>2</sup>  
610 g/m<sup>2</sup>

### FABRIC THICKNESS

0.032 in  
0.81 mm

### OPENNESS

Approximately  $\approx$  5%

### UV BLOCKAGE


Approximately  $\approx$  95%

### ACOUSTICAL

NRC .10 / SAA .11

FF50-108 Black


50% open factor

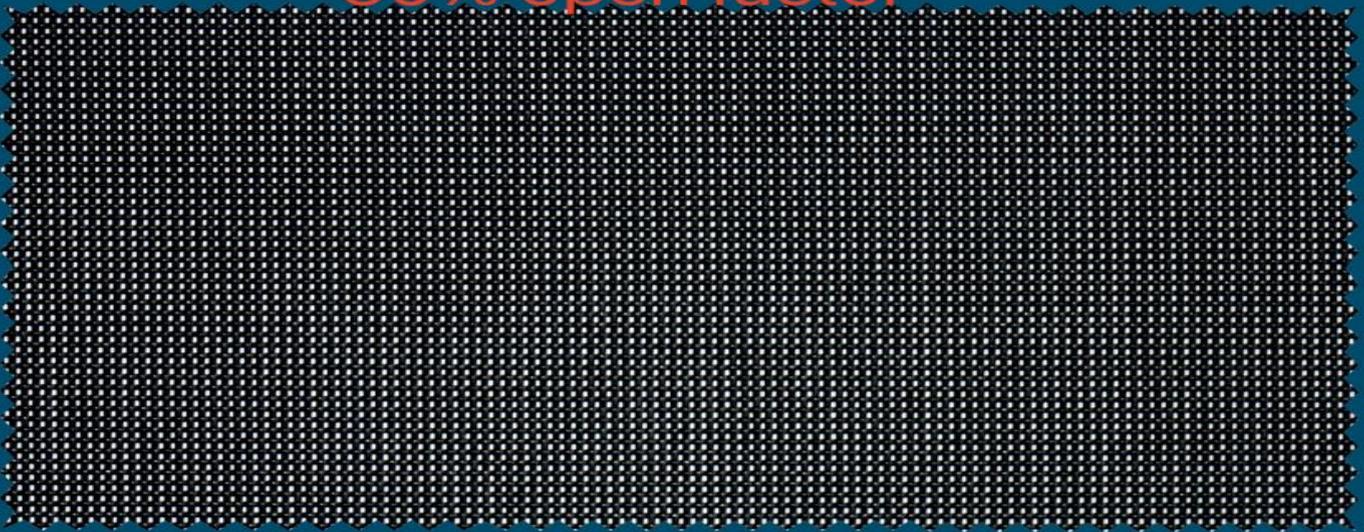


below FF10 is 10% open factor

SUNTEX 90 ARE ALSO AVAILABLE IN THE COLORS SHOWN BELOW


FF10-102 Grey Sand

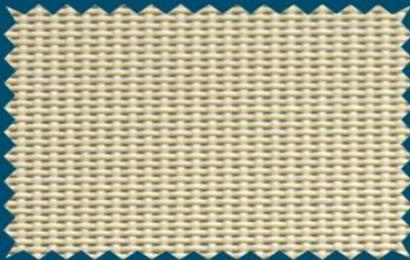


FF10-104 Grey

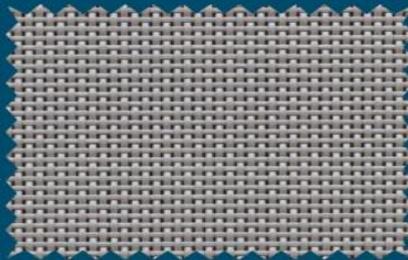


FF10-106 Brown

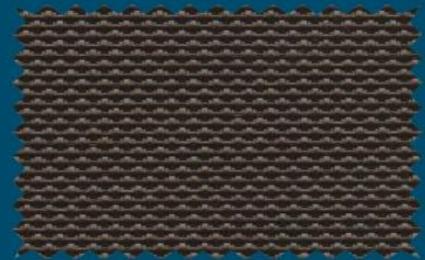

FF10-108 Black

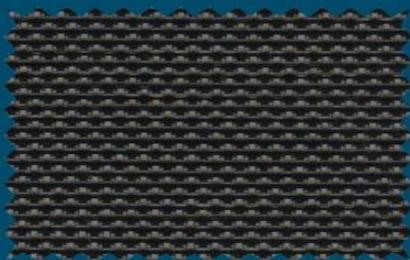

FF10-110 Walnut

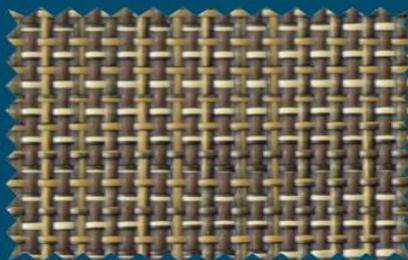

**TRACERY**

**COMPOSITION** 31% Polyester  
69% Vinyl on Polyester

**MESH WEIGHT** 16.5 oz/yd<sup>2</sup>  
559.44 g/m<sup>2</sup>

**FABRIC THICKNESS** 0.035 in  
0.889 mm

**OPENNESS** Approximately  $\approx$  10%

**UV BLOCKAGE** Approximately  $\approx$  90%